

## Connoisseur Inline Non Locking



### Features

- **Solid die cast construction**  
Heavyweight handle with sturdy feel
- **Heavy duty sprung latching wedge**  
Positive click on closing
- **Long handle**  
Greater leverage and easy to operate without catching a hand on the window
- **Classic design with a contemporary twist**  
Create an elegant and stylish window
- **Patented cover caps with colour coordinated finish**  
Perfectly matching components, even down to the smallest details
- **Slotted spindle (40mm version only)**  
Allows cropping to 5mm increments
- **Dedicated non locking handle**  
Conforms to building regulations for non locking windows
- **Supplied with screw and spindle pack**  
Everything needed for installation included



Hardex Chrome



Hardex Bronze



Hardex Gold



White



Black



Silver



Antique Black

## Connoisseur Inline Non Locking

### Ordering Details

#### Product

#### Connoisseur Inline Non Locking

Finish	Part No.
Spindle Size	30mm      40mm
Hardex Chrome	0C361      0C381
Hardex Bronze	0C363      0C383
Hardex Gold	0C365      0C385
Antique Black	0C366      0C386
White	0A360      0A380
Black	0A361      0A381
Silver	0A362      0A382

For additional part numbers please contact our sales office.

### Technical Information

#### Corrosion resistance

Meets the requirements of BS EN 1670:2007 Grade 5 (480 hours)

#### Operation

Endurance tested in excess of 25,000 cycles

#### Performance

Tested to meet the requirements of PAS 24 as part of a compliant window

### Material Specification

Handle Grip and Backplate: High quality Zinc for all Hardex finishes and Antique Black.  
High quality Aluminium for White, Black and Silver finishes

Coatings: Hardex Chrome, Hardex Bronze, Gold, Antique Black, White, Black and Silver


### Maintenance

For continued protection of the quality finish and appearance, we advise routine cleaning of all our external hardware. We recommend wiping it with a clean cloth soaked in warm water and mild detergent every month. Please refrain from using heavy-duty cleaners, containing Chlorine or Potassium. Moving parts should also be lightly lubricated using a light non-acidic mineral oil (e.g., "3 in 1") at least twice per year. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation. This procedure is particularly essential if products are used within a 25-mile radius of coastal areas or close proximity to building sites or large industrial areas, where more frequent cleaning may be required to prevent the accumulation of corrosive contaminants.


### Packaging

#### Handles

Individually bagged with screws, cover caps and care instructions.  
10 handles in an inner box, 60 handles in an outer box.

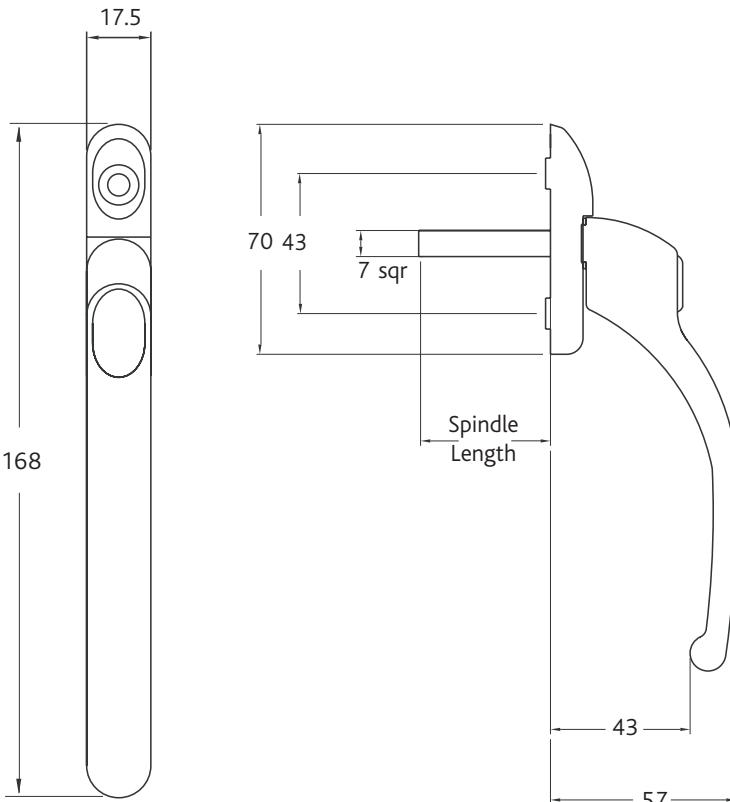


Front Cover Cap



Rear Cover Cap



Screws x 2



All dimensions are in mm and are nominal.

Fab & Fix reserves the right to change specification without notice  
It is the responsibility of the window manufacturer to ensure that the finished product meets any required safety and performance specification.