



Multi-Point Locks
for PVCu

FRENCH PATIO
& SLIDING DOORS

Patio Door Locking System for PVCu Doors



Features

- Minimum six point multi point locking for high security and anti slam pin on gearbox prevents misalignment of the lock until the door is closed correctly
- 16mm backset with an overall lock case depth of 31mm for ease of fabrication and minimal preparation to the profile
- Each locking cluster is guided by central anti-lift pin to ensure location into the keeps prior to locking
- Bi-directional throw of forged steel hooks for anti jemmying security, strength and durability
- 18mm shootbolt throw for maximum security top and bottom of the door
- Universal gearbox that is compatible with a standard Euro Cylinder or ERA Invincible cylinder. Lugs on the gearbox convert from a euro cylinder to Invincible shape
- Suits with the Fab&Fix Pembroke patio handle. Suitable for handles with a 7mm spindle and 92mm centre
- Full width non handed keep is manufactured from extruded heat treated Aluminium and anodised silver for aesthetics
- Keep allows for +/-2mm misalignment of keep and/or door drop
- Stainless steel insert protects the surface finish from the anti slam pin
- 4 screw fixing secure each locking cluster to profile



Mechanical
Guarantee

Patio Door Locking System for PVCu Doors

Ordering Details

Product

Patio Door Lock

Finish

Lock and Keep to suit Veka Profile

Part No.

DPDKTVEK

Technical Information

Corrosion resistance

Plated to BS EN 1670 Grade 4

Operation

Function test to 100,000 cycles

Material Specification

Lock case:

BZP CR3 Passivate + Seal

Face bar:

SS430

Hooks

Forged steel

Maintenance

All moving parts should be lightly lubricated using a light non-acidic mineral oil (e.g. "3 in 1") twice per year and the surface cleaned with a soft damp cloth. The product may need to be adjusted and fixings tightened to ensure a satisfactory operation.

Packaging

Lock and Keep

1 per box

Closed Position

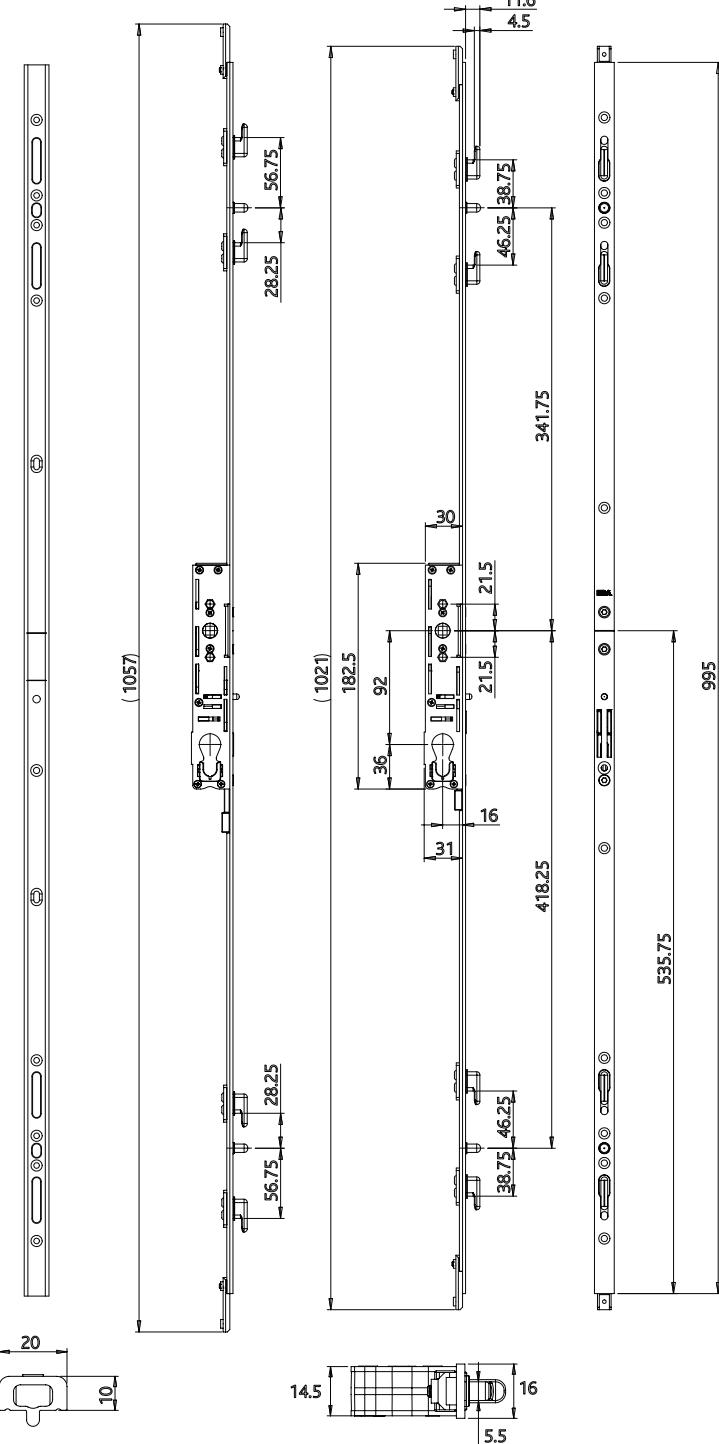


Diagram illustrates product in locked position. All dimensions are in mm and are nominal. ERA reserves the right to change specification without notice. It is the responsibility of the door manufacturer to ensure that the finished product meets any required safety and performance specification without notice.