


DVELI Flush Fit Trickle Vent for Doors Fitting Instructions

Installing a Flush Fit Trickle Vent

This is a sleek slimline trickle vent solution for ease of ventilation that is ideally suited for Bi-Fold doors. It can be used in most applications where the rout height is 16mm and under 374mm long.

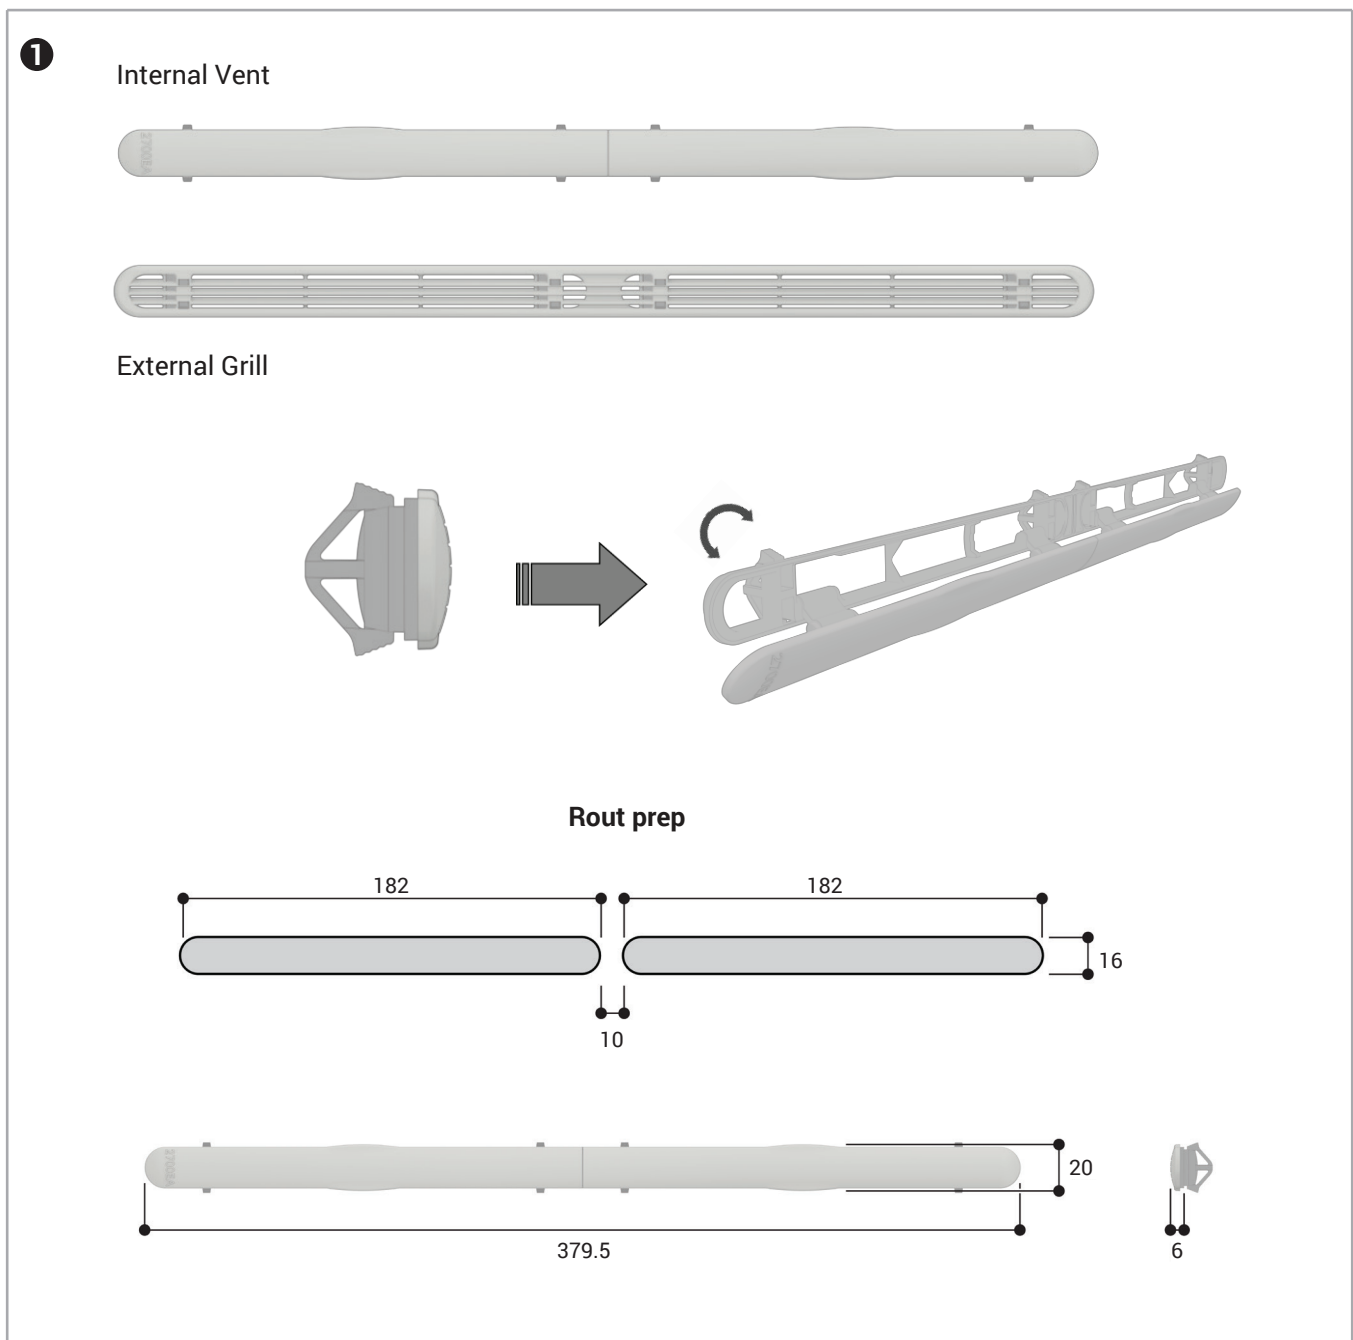


DVELI

Flush Fit Trickle Vent for Doors


Fitting Instructions

Installing a Flush Fit Trickle Vent

Rout the door using the rout prep provided, centre the vent in the frame, in most cases the vent can be fixed with clips only, in some cases a combination of clips and screws are needed for the best retention. We recommend a 4.5–3.9mm self-drilling screw which is suitable for use PVC with a head diameter less than 7mm.

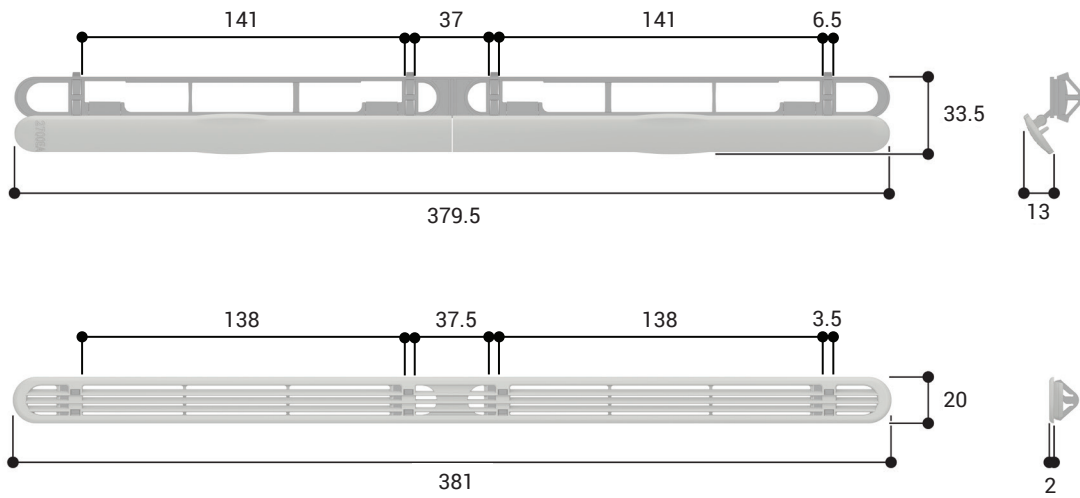

Door Section View (Bi-Fold)

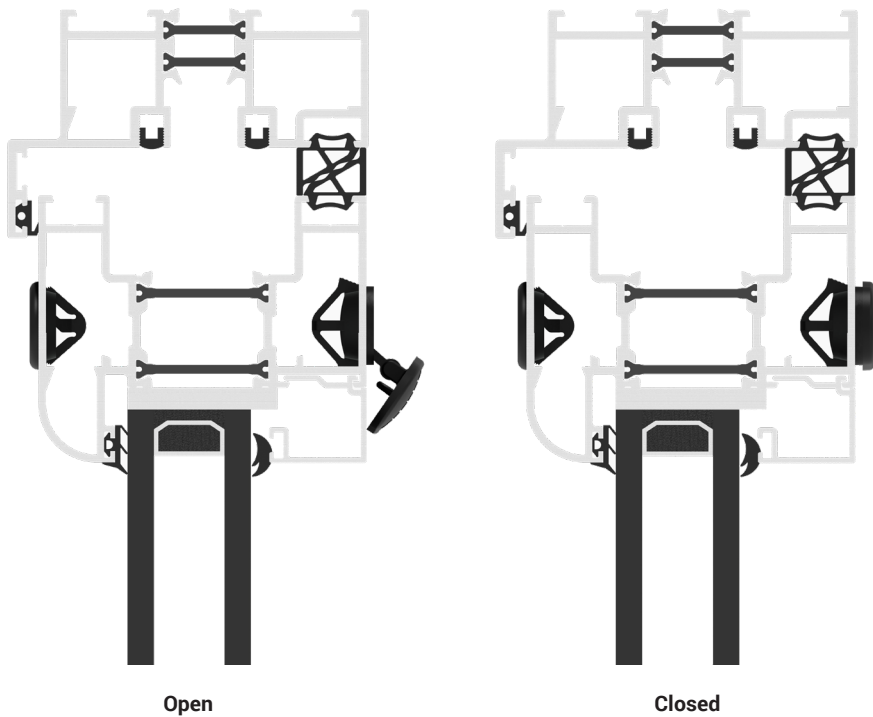

All dimensions are in mm. We reserve the right to change specification without notice. It is the responsibility of the window manufacturer and installer to ensure that the finished product meets any required building, safety and performance regulations.

DVELI

Flush Fit Trickle Vent for Doors

Fitting Instructions

Operating the Flush Fit Trickle Vent

Open and close by tilting the canopy on the internal vent, it has two canopies which operate independently to each other. The canopy can be tilted to direct the air in the desired direction due to the dual pivot hinge.

Maintenance of the Flush Fit Trickle Vent

Every 3 months gently brush the external grill and internal vent with a hand brush to remove any cobwebs and wipe down with soapy water using a damp cloth. Do not use abrasive cleaning products or abrasive cleaning materials. Where possible, gently open the internal vent and vacuum the cut-out rout clearing out any dust and debris for efficient performance.